



MC nozzle lances are designed to allow for the sliding nozzle lances to be taken out of the sleeves or clamp sleeves without having to dismantle the flanges.

Illu. 1

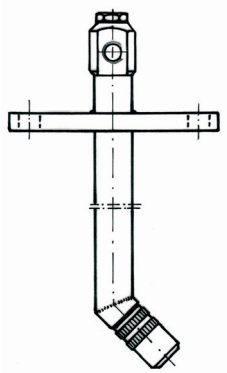


Nozzle lance with flange at choice, standard 120 mm Ø

Illu. 2

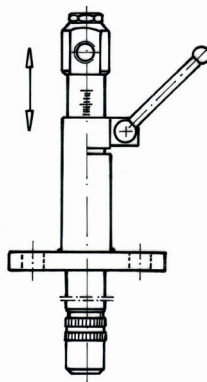


Nozzle lance with sliding sleeve and flange at choice, standard 120 mm Ø

Illu. 3

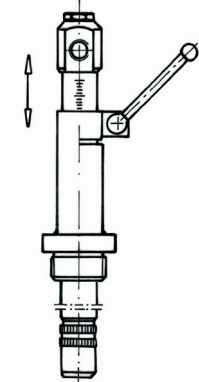


Nozzle lance with sliding sleeve and head thread, on request

Illu. 4

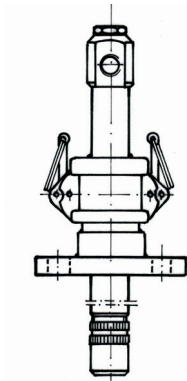


Nozzle lance with camloc fastener, fixed or with combined sliding sleeve

Illu. 5

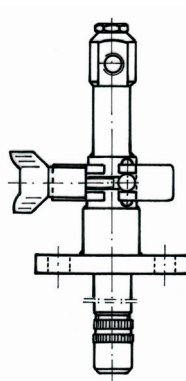


Nozzle lance with sold clamp and clamping nipples, fixed or with sliding sleeve

Illu. 6

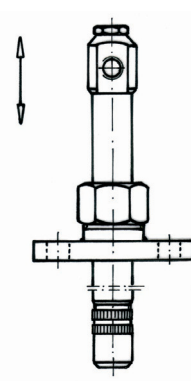


Nozzle lance with collet and sealing for pressure containers, slidable

Illu. 7

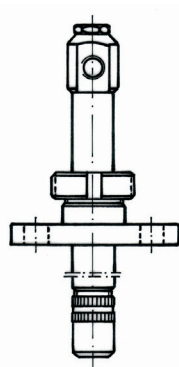

Nozzle lance with screw connection, fixed or slidable
DIN 11851
and DIN 11864-1

Illu. 8

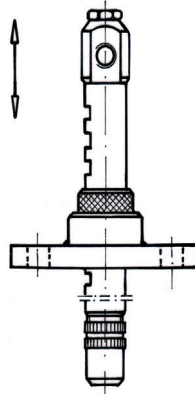

Nozzle lance with integrated height adjustment by means of a clampable adjusting disk, compatible with systems on the market

Illu. 9



Nozzle lance, clamping and height adjustment via a clamping ring screw connection, with head thread, suitable for ZL 3/8" and ZL 1/2" lance-Ø