



Illu. 1



Type DP

Standard air nozzle with bore- \varnothing 1.5 or 2.0 mm.
Maximum force of impact on isolated spots.
Made from aluminum.
Standard thread M 12x1, other threads available on request.


Illu. 2



Type DM

Air nozzle with protective cover. Prevents recoiling of fixed parts.
Made from aluminum.
Standard thread M 12x1, other threads available on request.


Illu. 3

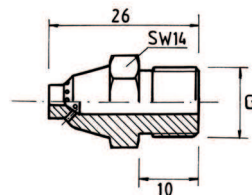

Type DK

Air jacket nozzle with conic air jacket prevents fixed parts from recoiling.
Made from aluminum.
Standard thread M 12x1, other threads available on request.


Illu. 4

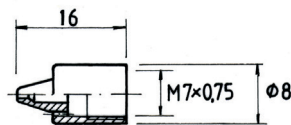

Type LLA

M 7x0.75
Functions as low-noise blowing nozzle when screwed on extension insert
(for technical data see page 6.9 - type LR).


Illu. 5

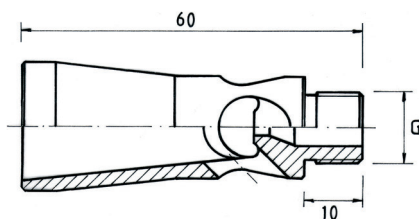

Type DJ

Injector air nozzle
The injected amount of air is trippled by means of a suction effect. Blowing forced increases by half.

Illu. 6

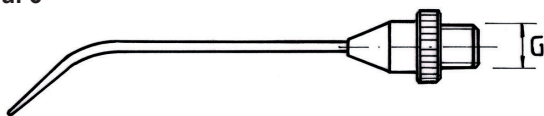


Type DVV

Extension insert (curved and linear)
Standard lengths **curved** 100 mm
150 mm
250 mm

Standard lengths **linear** 100 mm
150 mm
250 mm
400 mm

Illu. 7



Made from brass with 3 mm standard bore.

Ask us for other types!