


Jet Cleaner AT

MC

MC produces different jet cleaners of type **AT** with tumbling head, allowing for segments of a tank, container, etc. only to be cleaned.


MC's jet cleaner **AT** are produced as modular system. Combination variety corresponds to the 3D-jet cleaners on page 9.19. Only the cleaning head varies and therefore guarantees for the cleaning of a specific segment in, e.g. a container.

Illu. 1

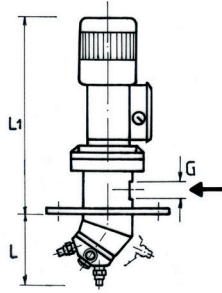


Type AT-E 30 - 140°
electronically propelled

Illu. 2

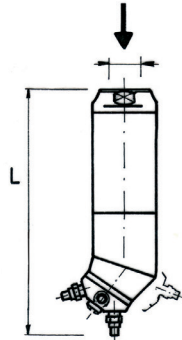


Type AT-W 70 - 140°
with self-propulsion
standard

Illu. 3

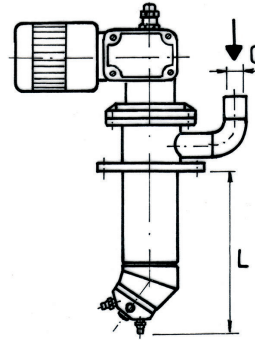


Type AT-GE 70 - 90°
with
elec. worm gear

90°-140° resp. 240°






Angles to choose


Illu. 4

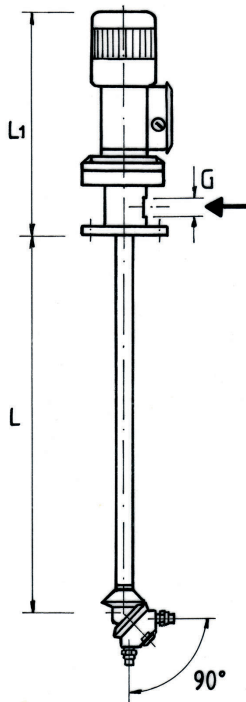




Type L-AT-E 30 - 180°



Illu. 5

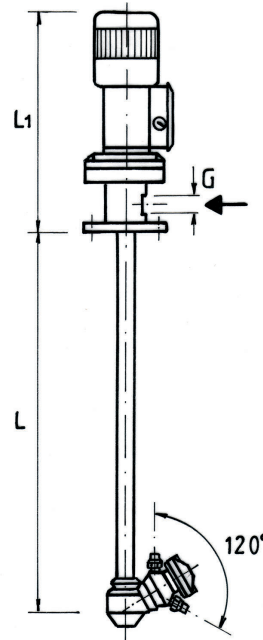

Type L-AT-E 30 - 240°

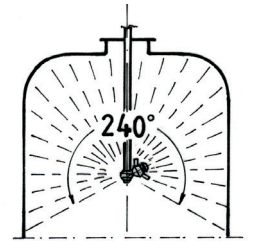

When ordering, please indicate type, tank-Ø, pump capacity (\dot{V} - l/min.) and pressure!

Type and L-AT	Max. \dot{V} (l/min.)	Max. pressure (bar)	Thread G	Lance pipe-Ø RL	Max. container opening Ø in mm				Rotations/min.		
					90°	140°	180°	240°	Electr. propuls.	Pneum. propuls.	Self-propulsion
AT 30	30	200*	1/4"	3/4"	80	115	70	90	appr. 10	10-50	5-20
AT 70	70	200*	1/2"	3/4"	-	115	-	-	appr. 10	10-50	5-20

* for inquiries: up to 400 bar available

The flow rate \dot{V} should not be exceeded significantly, regardless of the liquid pressure.